

MINIBLUE[®]



3 YEAR
WARRANTY

PERFORMANCE

21 dba

| MAX FLOW | MAX HEAD | MAX LIFT |
|-----------|----------|----------|
| 8 L/ HOUR | 8 METRES | 5 METRES |

Running either wet or dry, the MINIBLUE[®] is whisper quiet whilst reliably removing condensate and debris. Inherently reliable whilst self priming it gives peristaltic performance at the price of a piston pump. The MINIBLUE[®] is small enough to quickly fit, or retro fit, into any existing installation, saving both time and money.



UNIT
3.5-8 KW

SENSING OPTION

MINIBLUE[®] pump available with:

| CR PLUG | TEMPERATURE SENSOR |
|---|---|
| X87-500 | X87-504 |
|  |  |



**RUN
DRY**


All of the BLUEDIAMOND[®] pumps have the ability to run dry without burning out. Enabling them to remove any liquids, preventing organic growth inside the tubing.



**WHISPER
QUIET**


Quiet in all stages of operation and not only when set to quiet mode or relying on a soft start setting.

DISCHARGE PIPE RUN

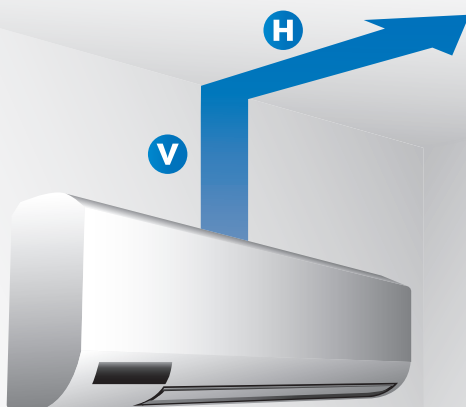


*8 KW MAX

PERFORMANCE

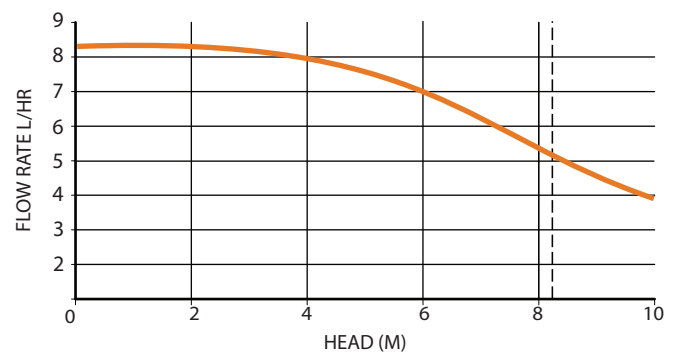

DIMENSIONS (MM)

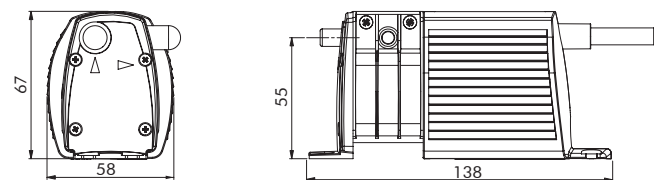

| V (VERTICAL) | H (HORIZONTAL) |
|--------------|----------------|
| 8 M | 0 M |
| 7 M | 3 M |
| 6 M | 6 M |
| 5 M | 9 M |
| 4 M | 12 M |
| 3 M | 15 M |
| 2 M | 18 M |
| 1 M | 21 M |

The MINIBLUE[®] can be mounted in any orientation up to 8m away from the A.C unit.